

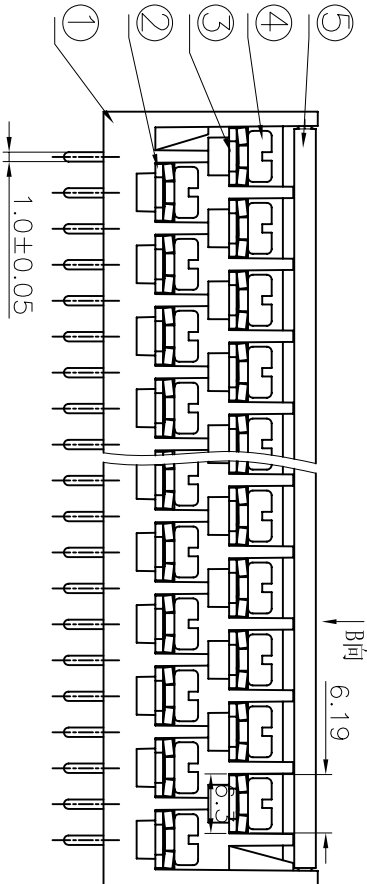


Notes:

- 1. Pitch: 7.62mm , Δ Δ
- Poles: 6, 8, 12, 16, 20, 26, 30, 36, 48P
- 2. Rated voltage/current: UL 300V/15A
IEC 250V/17.5A
- 3. Operation temperatures: -40℃~+105℃
- 4. Withstanding Voltage: AC2000V/1min
- 5. Insulation Resistance: 500M Ω /DC500V
- 6. Wire Range: 14~22AWG, 1.5mm²
- 7. Max. Torque Value: M3, 5, 1kgf.cm
- 8. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm										
over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	over 200 to 300	over 300 to 400	over 400 to 500	over 500 to 600	over 600 to 700	—
6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 300	300 to 400	400 to 500	500 to 600	600 to 700	—
± 0.10	± 0.15	± 0.25	$\pm 0.2 \pm 0.3$	$\pm 0.5 \pm 0.7$	± 1.0	0.05	0.10	0.15	0.20	0.25	—

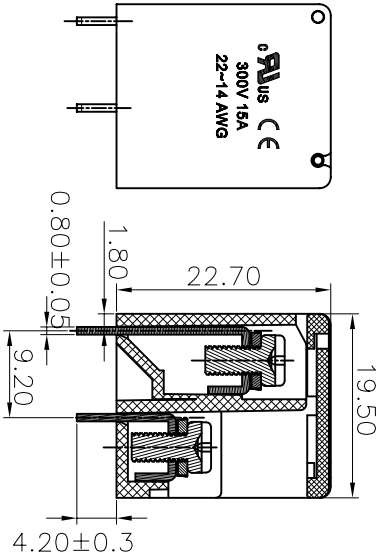

REVISION RECORD			
REV	ECO	DESCRIPTION	DRAFT DATE
1	1	Drawing revise	WJ 12/20/06
2	2	品名、料号增加环保标识“(H)”	Ye j 12/08/07
3	3	更新图面	LJH 05/21/08
4	4	最短线由8P改为6P	YHG 06/16/09
5	5	修改图面	ZYH 07/15/09

6	DC24-Label	Δ 5017TX001 (H)	1	Paper
5	DC24-1-B-XXP-17-00A Cover	Δ 5017C07XXA (H)	1	PC
4	M3*6 (6*6) Bright screws	S000000450 (H)	XX	Steel
3	DC24-1 Long Pin header	5017B00030 (H)	XX/2	Brass
2	DC24-1 Short Pin header	5017B00040 (H)	XX/2	Brass

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DC24-1-B-XXP-1Y-00A Housing	5017A0YXXA (H)	1	PA66+23%GF	UL94V-0
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED					
MM	INCH	DATE	DATE	DATE	DATE
0 ±	±	DATE	DATE	DATE	DATE
0.00 ±	±	DATE	DATE	DATE	DATE
ANGLES ± 1°	±	DATE	DATE	DATE	DATE
THIRD ANGLE PROJECTION	SCALE : 1:1	NAME	DATE	DATE	DATE
DRAWING NO. DC24-1-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					

DEGSON 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DC24-1-B-XXP-1Y-00A(H)

DRAWING NO. DC24-1-E01

/PART NO.

DO NOT SCALE DRAWING

SHEET 1 OF 1