
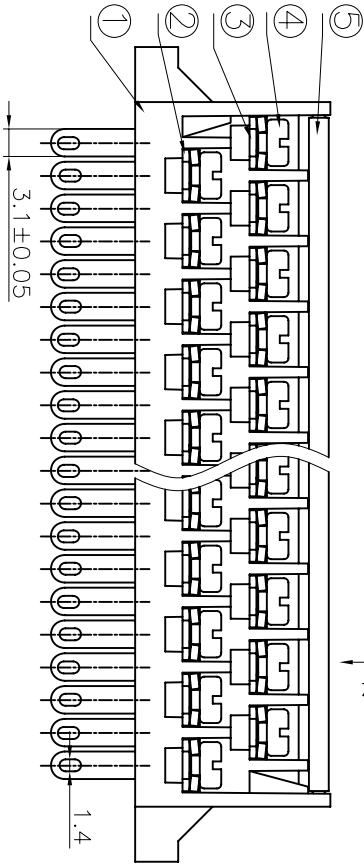
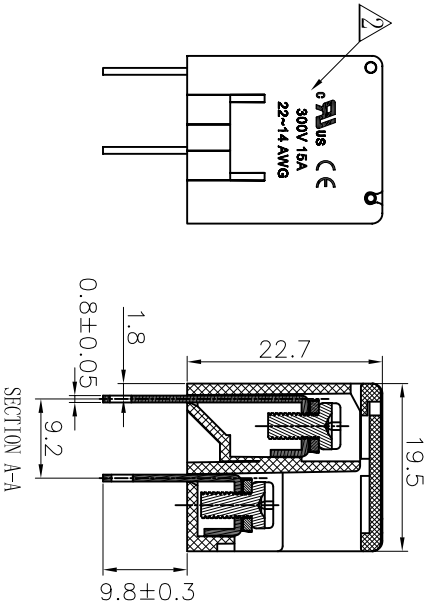
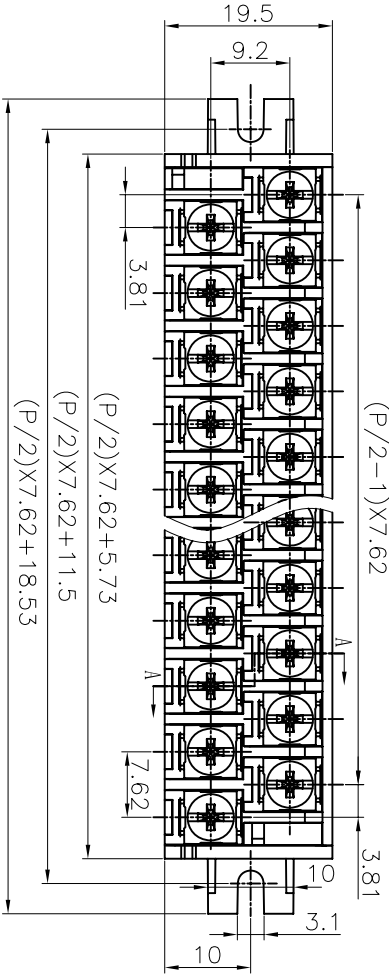


Notes: △

1. Pitch: 7.62mm , Poles: 8P-48P (偶数P)
2. Rated voltage/current: UL 300V/15A IEC 250V/17.5A
3. Operation temperatures: -40℃~+105℃
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 1000MΩ/DC500V
6. Wire Range: 22~14AWG, 1.5mm²
7. Max. Torque Value: M3, 5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm		
over 6	over 10	over 30	over 60	over 100
to 6	to 10	to 30	to 60	to 150
to 10	to 24	to 60	to 100	to 150
±0.10	±0.15	±0.25	±0.3±0.5±0.7±1.0	0.005/10

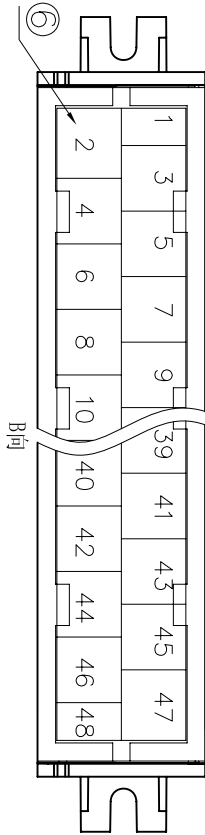

REVISION RECORD			
REV	ECO	DESCRIPTION	DATE
△		Drawing revise	12/30/06*
△		增加U-刻字	03/28/07*
△		品名、料号增加环保标识“(0)”	12/08/07*
△		更新图面	05/21/08*
△		修改图面	07/15/09*

6	DG24-Label	△ 5017TXX001 (H)	1	Paper
5	DG24-1-00A Cover	△ 5017C07XXA (H)	1	PC
4	M3*6 (6*6) Bright screws	S000000450 (H)	XX	Steel
3	DG24-2 Long Pin header	5018B00030 (H)	XX/2	Brass
2	DG24-2 Short Pin header	5018B00040 (H)	XX/2	Brass

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG24-2-00A Housing	5018M0YXXA (H)	1	PA66+23%GF	UL94V-0
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED					
MM (INCH)					
ANGLES ± 1°					
THIRD ANGLE PROJECTION					
SCALE : 1:1					
NAME					
DRAWING NO. DG24-2-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					