
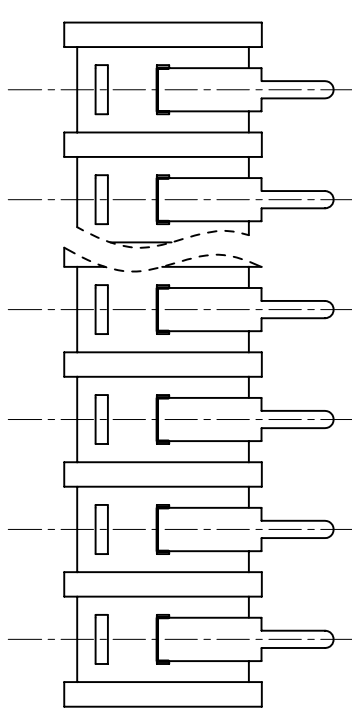
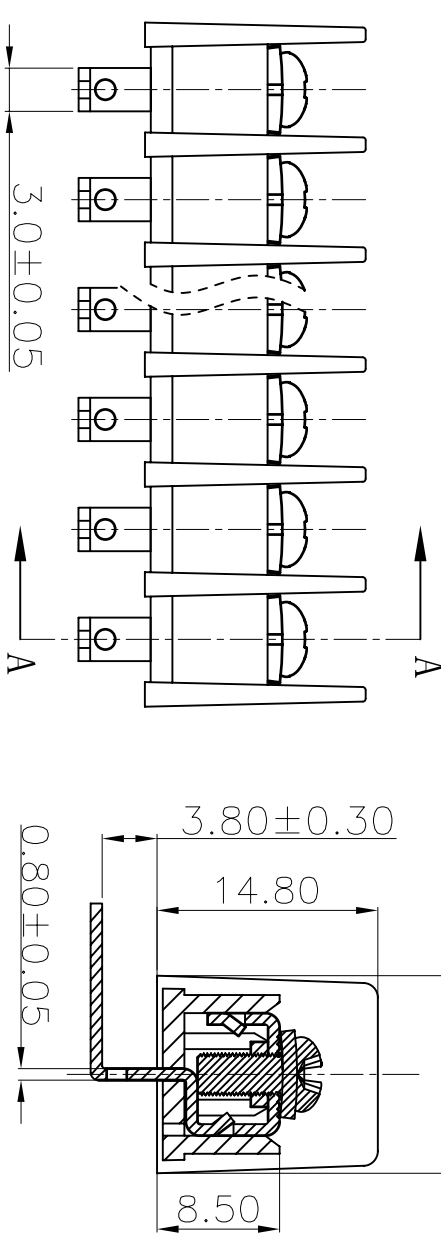


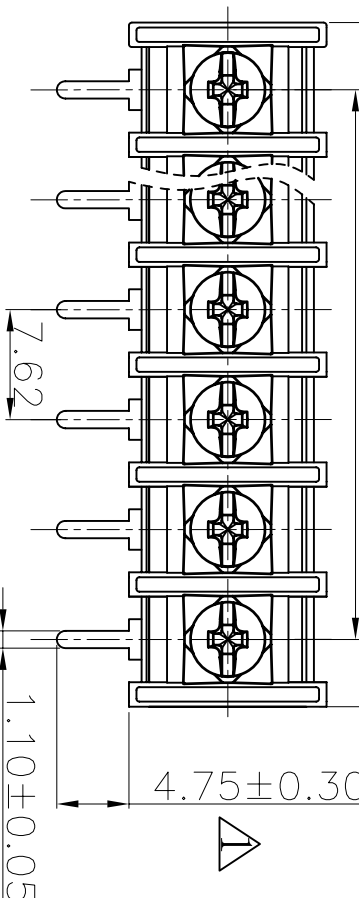

REVISION RECORD			
REV	ECO	DESCRIPTION	DRT DATE
1		品名、规格、材料及图号	CSX 06/07/05
2		品名、规格、材料及图号	CSX 07/20/06
3		品名、规格、材料及图号	CSX 11/08/06
4		品名、规格、材料及图号	Yej 12/08/07

NOTES:

1. Pitch: 7.62mm
2. Rated current: 15A
3. Rated voltage: 300V
4. Operation temperatures: -40° C ~ +105° C
5. Insulation Withstand Voltage: AC2000V/1Min
6. Insulation Resistance: 500MΩ /DC500V
7. Wire Range: 22~14AWG
8. Max. Torque: 5.10kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range in mm	
over 6 to 10	over 30 to 60	over 100 to 150
10 to 24	24 to 30	30 to 60
24 to 30	30 to 60	60 to 100
30 to 60	60 to 100	100 to 150
60 to 100	100 to 150	150 to 200
100 to 150	150 to 200	200 to 250
250 to 300	300 to 350	350 to 400
400 to 450	450 to 500	500 to 550
550 to 600	600 to 650	650 to 700
700 to 750	750 to 800	800 to 850
850 to 900	900 to 950	950 to 1000

DEGSON
DG25
300V
15A

22~14 AWG
2.5mm²
UL
CSG

Section A-A

DETACHED LISTS			
ITEM	NAME OF PART	NO. OF PART	Q"TY
1	3#6 bright-Screw	XX	Steel
2	DC25R-Pin Header	XX	Brass
3	DC25R-B-Housing	XX	SnCe
4	5001A01XXA(H)	1	PA66
5	UL94V-0		UL94V-0
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			