




REVISION RECORD			
REV	ECO	DESCRIPTION	DRAFT DATE
△		图面更新	CSX 07/20/06
△		增加IL刻字	Yej 11/06/06

NOTES:



1. Pitch:7.62mm
2. Rated current:15A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/1Min
6. Insulation Resistance:500MΩ /DC500V
7. Wire Range:22~14AWG
8. Max. Torque:5.10kgf.cm
9. Undimensioned Tolerances:

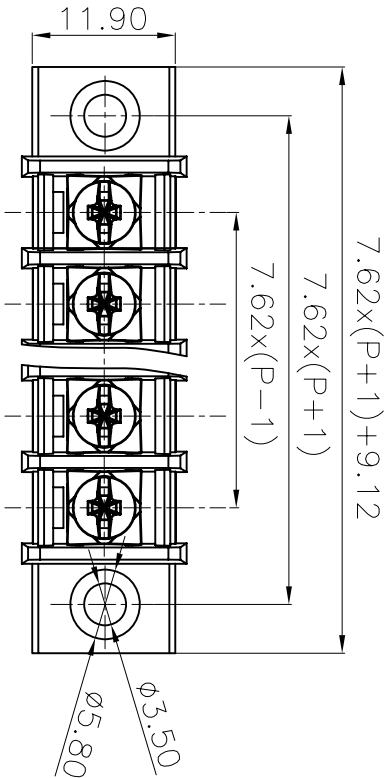

Pitch range in mm		Nominal dimension range					
in	mm	in	mm	in	mm	in	mm
6	over	10	over	6	over	over	over
10	10	10	10	30	30	200	200
10	10	24	6	30	90	200	480
10	10	10	25	10	25	10	25

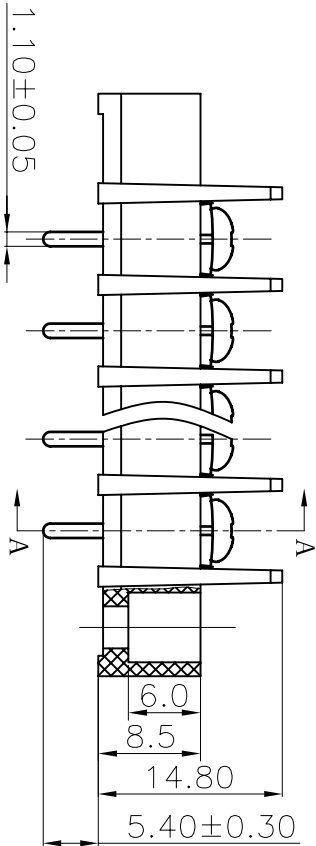

Section A-A



3	3*6 bright-Screw	S000000450(H)	XX	Steel	Ni Plated
2	DG25S-Pin Header	5001B00090(H)	XX	Brass	SnCe

1	DG25S Housing	5001M0YXXA(H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART		Q'TY	MATERIAL	NOTES
DETACHED LISTS						
TOLERANCES EXCEPT AS NOTED		DRTO Home	DATE 03/20/06	NAME DG25S-A-XXP-1Y-00A(H) DRAWING NO. DG25S-E03 /PART NO. DO NOT SCALE DRAWING		
MM		CHNO	DATE			
(INCH)		MFO	DATE			
APPL		DATE				
ANGLES ± 1°		G.E :		SIZE REV 12 A3 1/16/06		
.00 ±		MATERIAL :				
.000 ±		FINISH :				
THIRD ANGLE PROJECTION		SCALE : 1:1		SHEET 1 OF 1		